


INSTALLATION MANUAL

- (A) 4 x Composite Input/Output
- (B) RJ45 socket

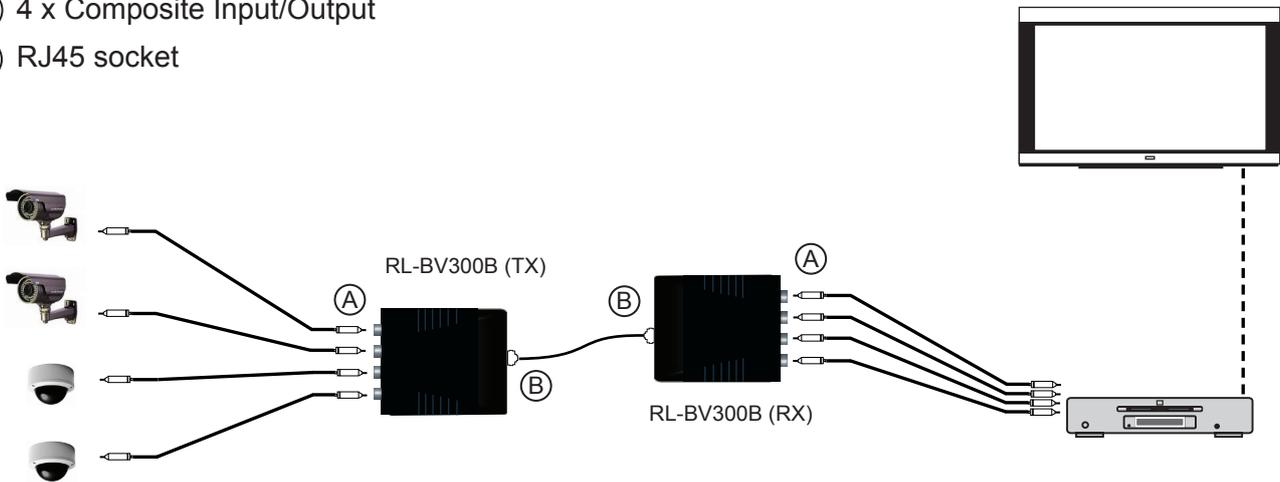

Cable Requirements

4 pair twisted cable

Hardware Connection

1. Ensure all power to equipment is switched off prior to installation
2. Connect Composite Video cables from CCTV Video Cameras to terminals (A) of Transmitter
3. Connect RJ45 socket (B) of Transmitter to RJ45 socket (B) of Receiver via 4 pair twisted cable (Cat5 or better)
5. Connect Composite Video cables from terminals (A) of Receiver to DVR/TV or other CCTV equipment
6. Once installation is complete, switch on power to all equipment

Maximum input	1.1V P-P
Return loss	>15dB to 1,000 MHz
Common mode rejection	>40dB @ 1,000 MHz
Maximum distance colour	Up to 100m
Video signal	Composite
Configuration	4:1
Connections - In/Out	4 x RCA Video
	1 x RJ45
Power	Not required

WARRANTY

Vcomm Pty Ltd states that the warrant that the customer can rely on is that provided by the manufacturer. In the event of any warranty claim please contact us and we will forward it to the manufacturer. The manufacturer will then determine the extent of their liability. This expressly negates, to the extent possible by Australian law, any warranty reliance on Vcomm Pty Ltd.

Vcomm Pty Ltd
ABN: 99 091 281 524